


Vaisala DTR13, DTR13F and DTR15 Radiation Shields

- **Fiberglass-filled polyester**
- **UV-proof**
- **Excellent ventilation**
- **Does not absorb water**

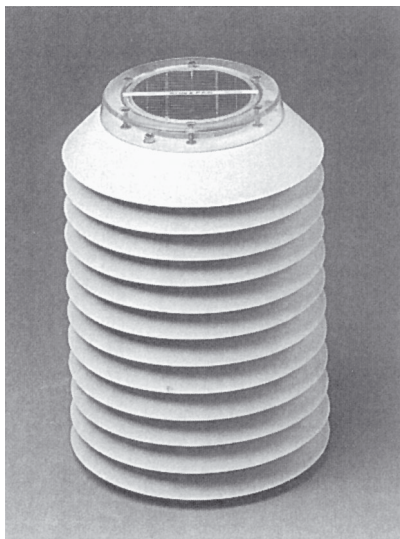

DTR13F RADIATION SHIELD


is made of the same material as the DTR13 to withstand wind driven saltwater, rain and sunlight. In addition to natural ventilation, a solar powered fan provides extra ventilation to guarantee correct ambient temperature readings during calm days and nights.

A solar panel element, an integrated battery back-up and the fan are attached to the top part of the shield. 4-inch solar cells produce electricity for the fan's DC motor and recharge the NiCad battery. A fully charged battery has enough capacity to run the fan for a couple of cloudy days.

The installation and sensor mounting are identical to those of the DTR13 Radiation Shield.

DTR15 GROUND RADIATION SHIELD

is designed to reflect the sun's direct radiation by means of its highly reflective white surface. It is used to protect the DTS12G Grass/Soil Temperature Probe from solar radiation and rain. The shield is fastened to its location by inserting its three stainless steel spikes into the ground.

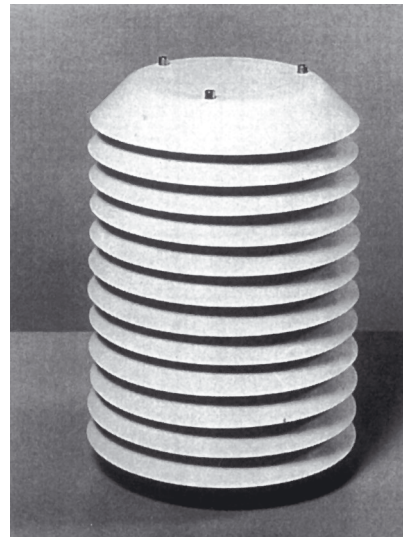


DTR13 RADIATION SHIELD

The naturally ventilated maintenance-free provides protection from scattered as well as direct solar radiation and rain. The material is specially designed fiberglass-filled polyester to offer excellent thermal characteristics and durable UV-proof construction. The outer surface is painted white to reflect radiation while the inside is black to absorb accumulated heat.

The design of the DTR13 enables easy installation and sensor mounting. Not only Vaisala's sensors, such as the HMP35D Temperature & Humidity Probe or the DTS12A Air Temperature Probe can be used with the shield, but also environmental sensors of other manufacturers.

The radiation shield is tested to withstand vibration according to IEC 6-2 (Fc, sinusoidal vibration).

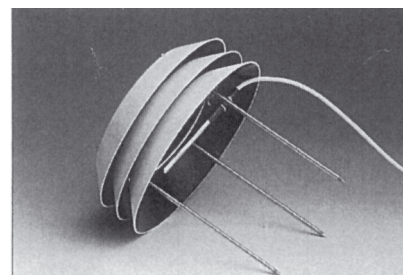

TECHNICAL INFORMATION

DTR13 RADIATION SHIELD

DIMENSIONS

Outer diameter	220 mm
Outer height	300 mm
Inner diameter	110 mm
Inner height	223 mm
Weight	1.9 kg

INSTALLATION

With screws to sensor support arm (square tube 40 mm)

With installation clamp (part number 16215) to round tube

DTR13F RADIATION SHIELD

DIMENSIONS

Outer diameter	220 mm
Outer height	310 mm
Inner diameter	110 mm
Inner height	200 mm
Weight	2.1 kg

INSTALLATION

With screws to sensor support arm (square tube 40 mm)


Fan

Operates when the battery charge is sufficient.
The battery is charged by a solar cell.

Battery NiCad, 1150 mAh

Operating temperature -20 °C to +60 °C

Storage temperature -20 °C to +35 °C

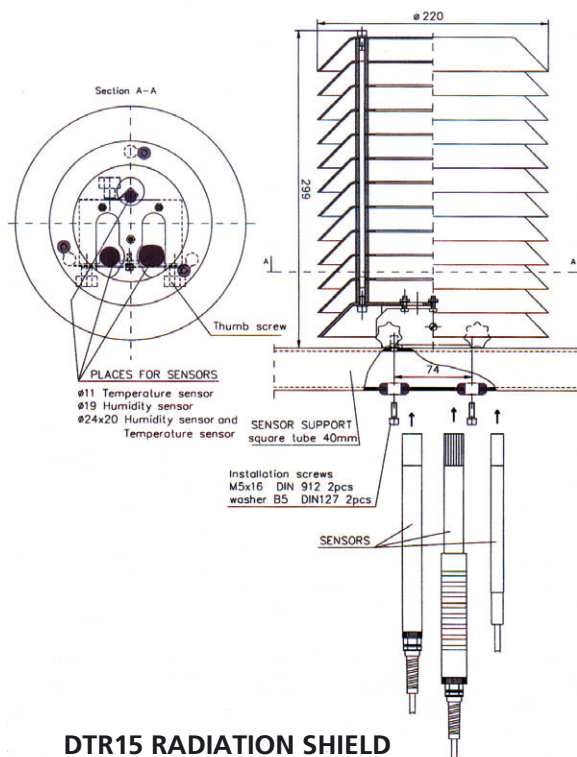

DTR15 RADIATION SHIELD

DIMENSIONS

Outer diameter	220 mm
Outer height	110 mm (+ 180 mm spikes)
Inner diameter	110 mm
Inner height	50 mm
Weight	1.4 kg

INSTALLATION

Spikes inserted into ground



Your Partner in All Weather

Vaisala Oyj
Helsinki, Finland
Tel. +358 9 894 91
Fax +358 9 894 9227

Vaisala GmbH
Hamburg, Germany
Tel. +49 40 839 030
Fax +49 40 839 03 110

Vaisala Ltd
Birmingham, UK
(Traffic Weather Products)
Tel. +44 121 683 1200
Fax +44 121 683 1299

Vaisala Ltd
Newmarket, UK
(Upper Air and Surface Weather Products)
Tel. +44 1638 576 200
Fax +44 1638 576 240

Vaisala SA
Paris, France
Tel. +33 1 3057 2728
Fax +33 1 3096 0858

Vaisala SA
Thunderstorm Business Unit
Meyreuil, France
Tel. +33 4 4212 6464
Fax +33 4 4212 6474

Vaisala Inc.
Woburn, MA, USA
Tel. +1 781 933 4500
Fax +1 781 933 8029

Vaisala Inc.
Columbus, OH, USA
(Aviation Weather Systems)
Tel. +1 614 873 6880
Fax +1 614 873 6890

Vaisala Inc.
Boulder, CO, USA
(Upper Air Products)
Tel. +1 303 499 1701
Fax +1 303 499 1767

Vaisala Inc.
Boulder, CO, USA
(Wind Profiling Products)
Tel. +1 303 443 2378
Fax +1 303 443 1628

Vaisala Inc.
Sunnyvale, CA, USA
(Surface Weather Products)
Tel. +1 408 734 9640
Fax +1 408 734 0655

Vaisala Inc. Regional Office
London, ON, Canada
Tel. +1 519 679 9563
Fax +1 519 679 9992

Vaisala KK
Tokyo, Japan
Tel. +81 3 3266 9611
Fax +81 3 3266 9610

Vaisala Pty Ltd
Hawthorn, Vic, Australia
Tel. +61 3 9818 4200
Fax +61 3 9818 4522

Vaisala Beijing Representative Office
P.R.China
Tel. +86 10 6522 4041
Fax +86 10 6522 4051

Vaisala Regional Office Malaysia
Kuala Lumpur, Malaysia
Tel. +60 3 2169 7776
Fax +60 3 2169 7775

For more detailed contact information and for other Vaisala locations visit us at: www.vaisala.com